

ZhongCheng Parking Air Conditioner



WhatsApp



Wechat



Website

Zhongcheng Auto Parts Co., Ltd.

MOBILE PHONE :

+86 16678259207

WHATSAPP/WECHAT :


+86 16678259207

EMAIL ADDRESS :

yumielectronic2025@gmail.com

COMPANY ADDRESS :

No. 150, Zhangbei Road, Guoli Town Huantai County, Zibo City, Shandong Province

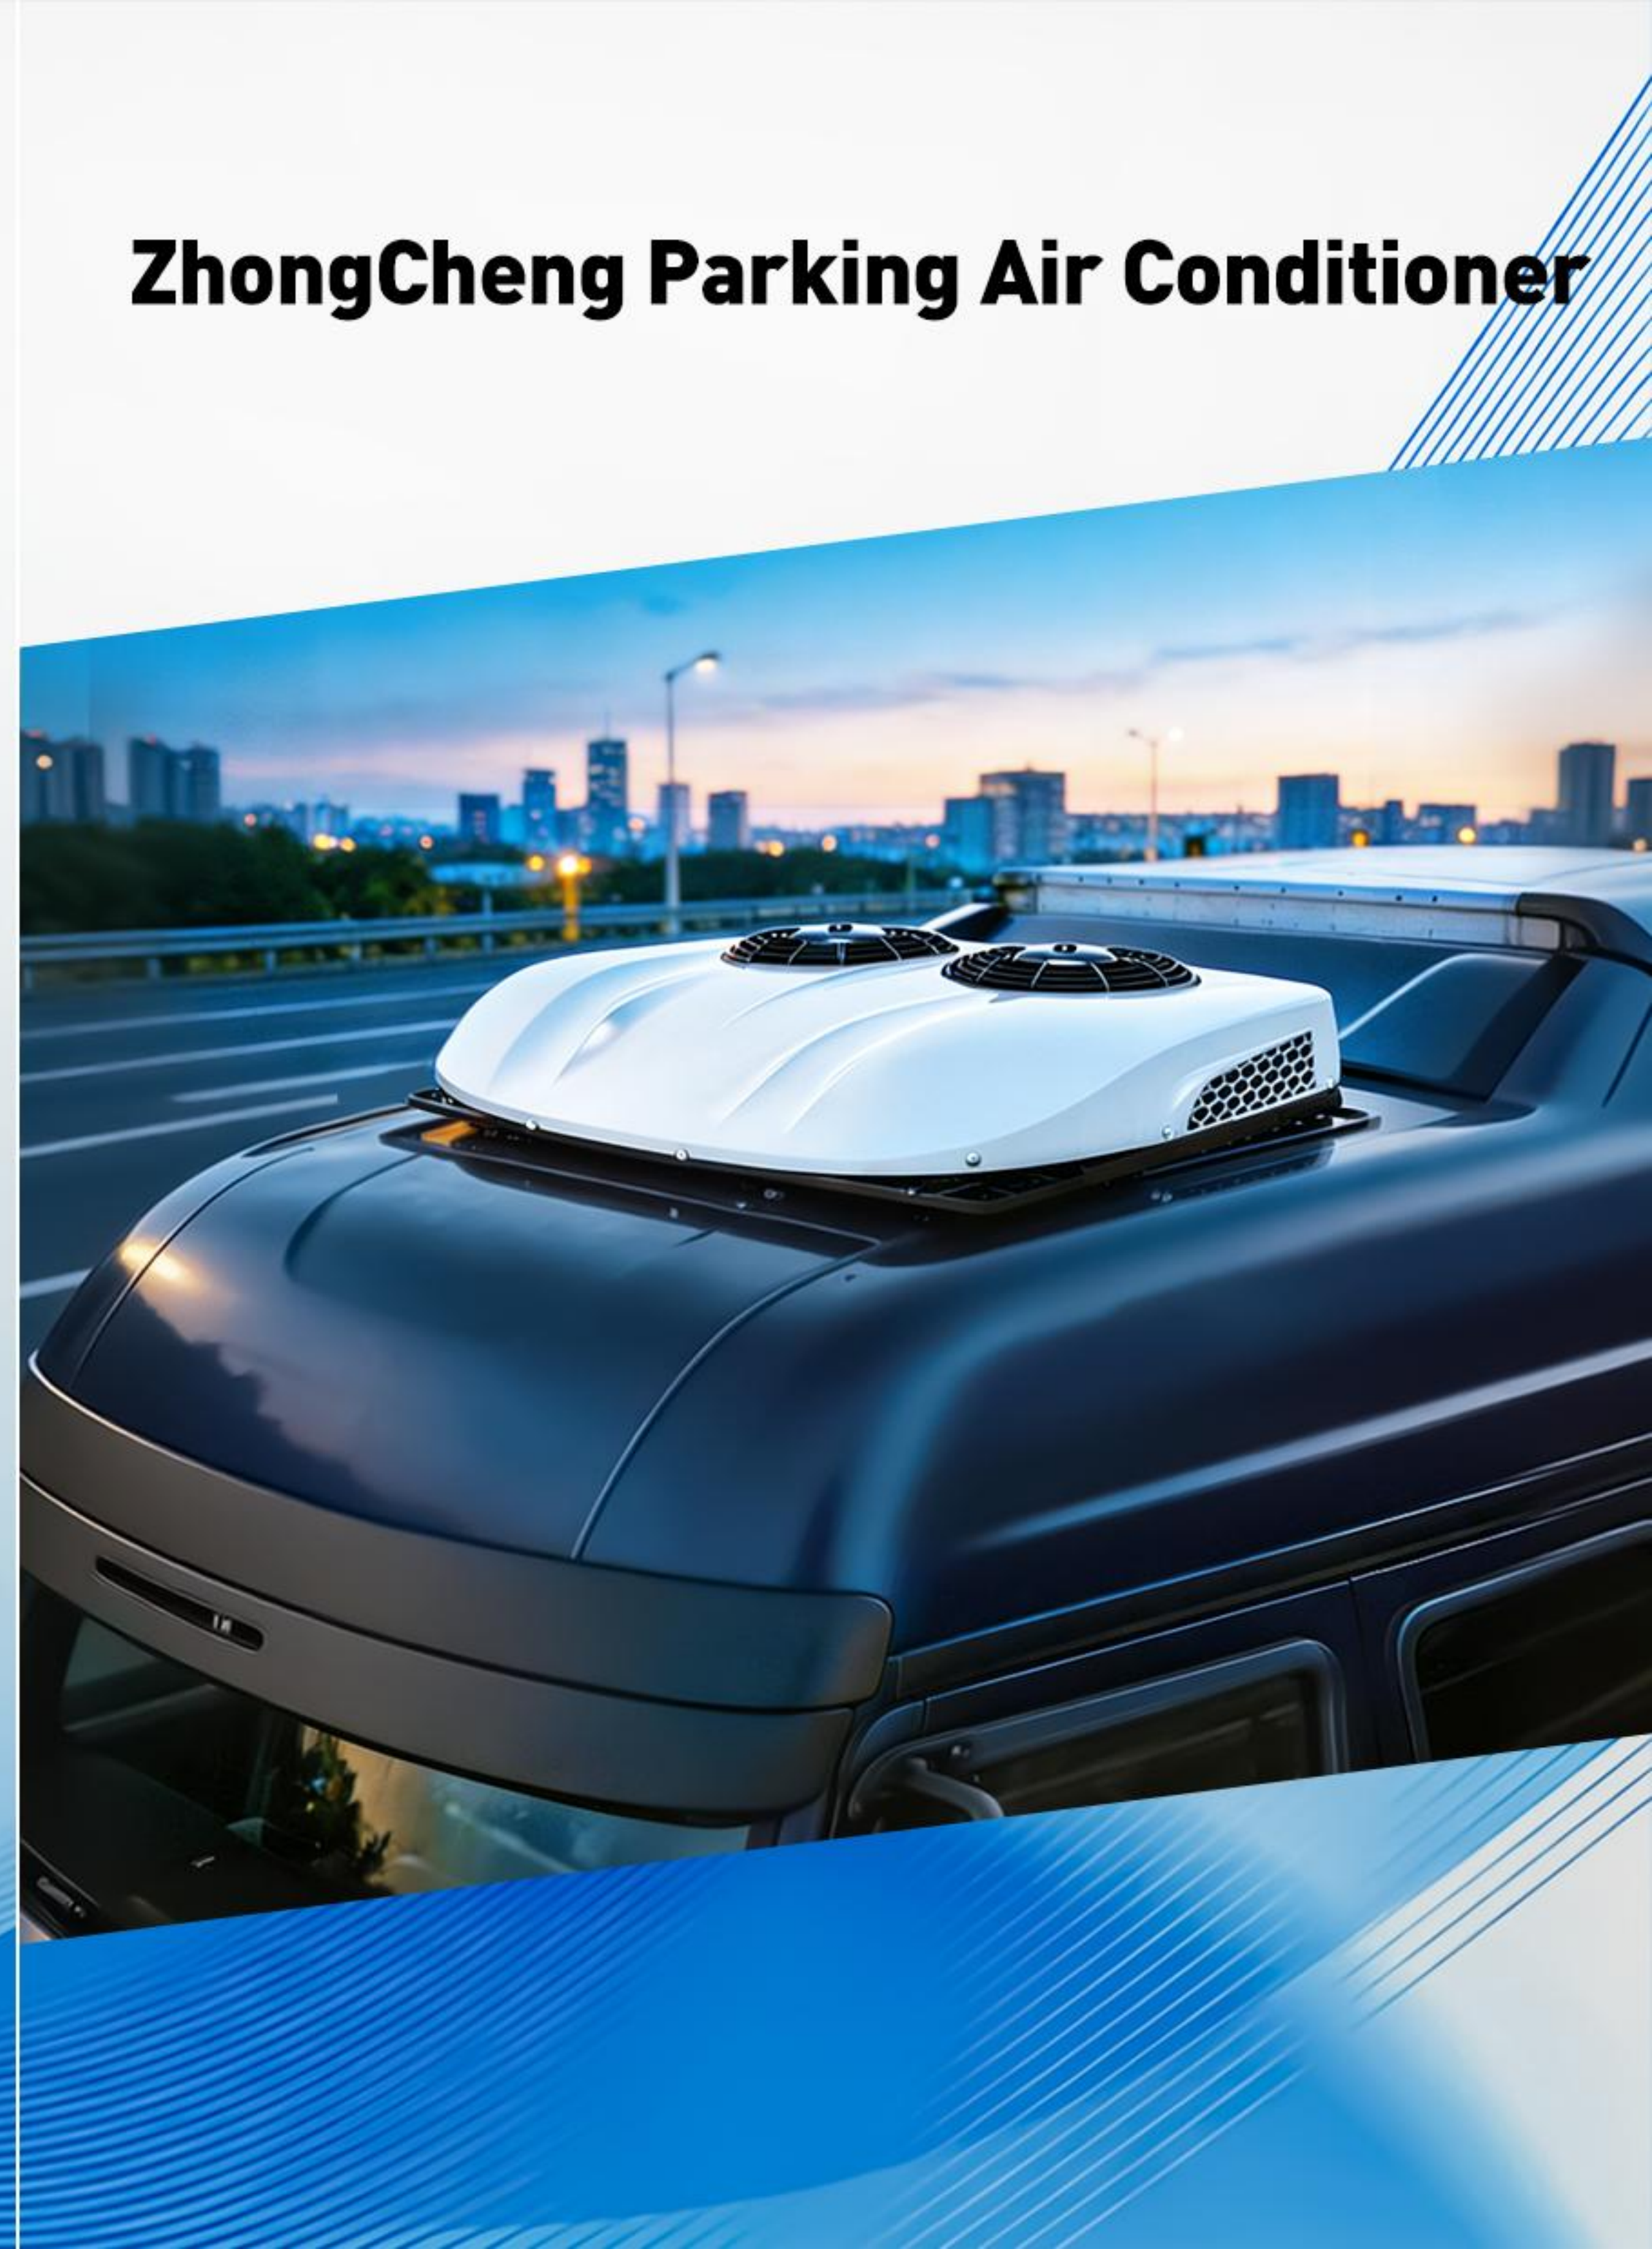

ZHONGCHENG AUTO PARTS CO., LTD.

Zhongcheng Auto Parts Co., Ltd. is a leading manufacturer backed by authoritative certifications and strong quality assurance. We hold a unique position in China as the only enterprise with fully independent production and assembly capabilities for core components including compressors, fans, evaporators and condensers. With a professional R&D team of over 50 engineers, we keep optimizing product performance and launching innovative models steadily.

Our 60,000 factory equipped with multiple automated lines enables a daily output of over 3,000 units, ensuring stable supply and on-time delivery for large orders. Every unit passes 100% strict testing in line with international standards, covering cooling, heating, noise, waterproofing and vibration performance. We also provide flexible OEM & ODM customization and a full-range one-stop service from inquiry to shipment, supported by a professional after-sales team for timely support.



IOS9001



IATF16949



Patent Certificate



ISET



CE Certificate



Patent Certificate



Factory

60000m²



Daily output

3000+ Units



Sales volume

5 Million+




Experience

15 Years



Staff member


800+ People

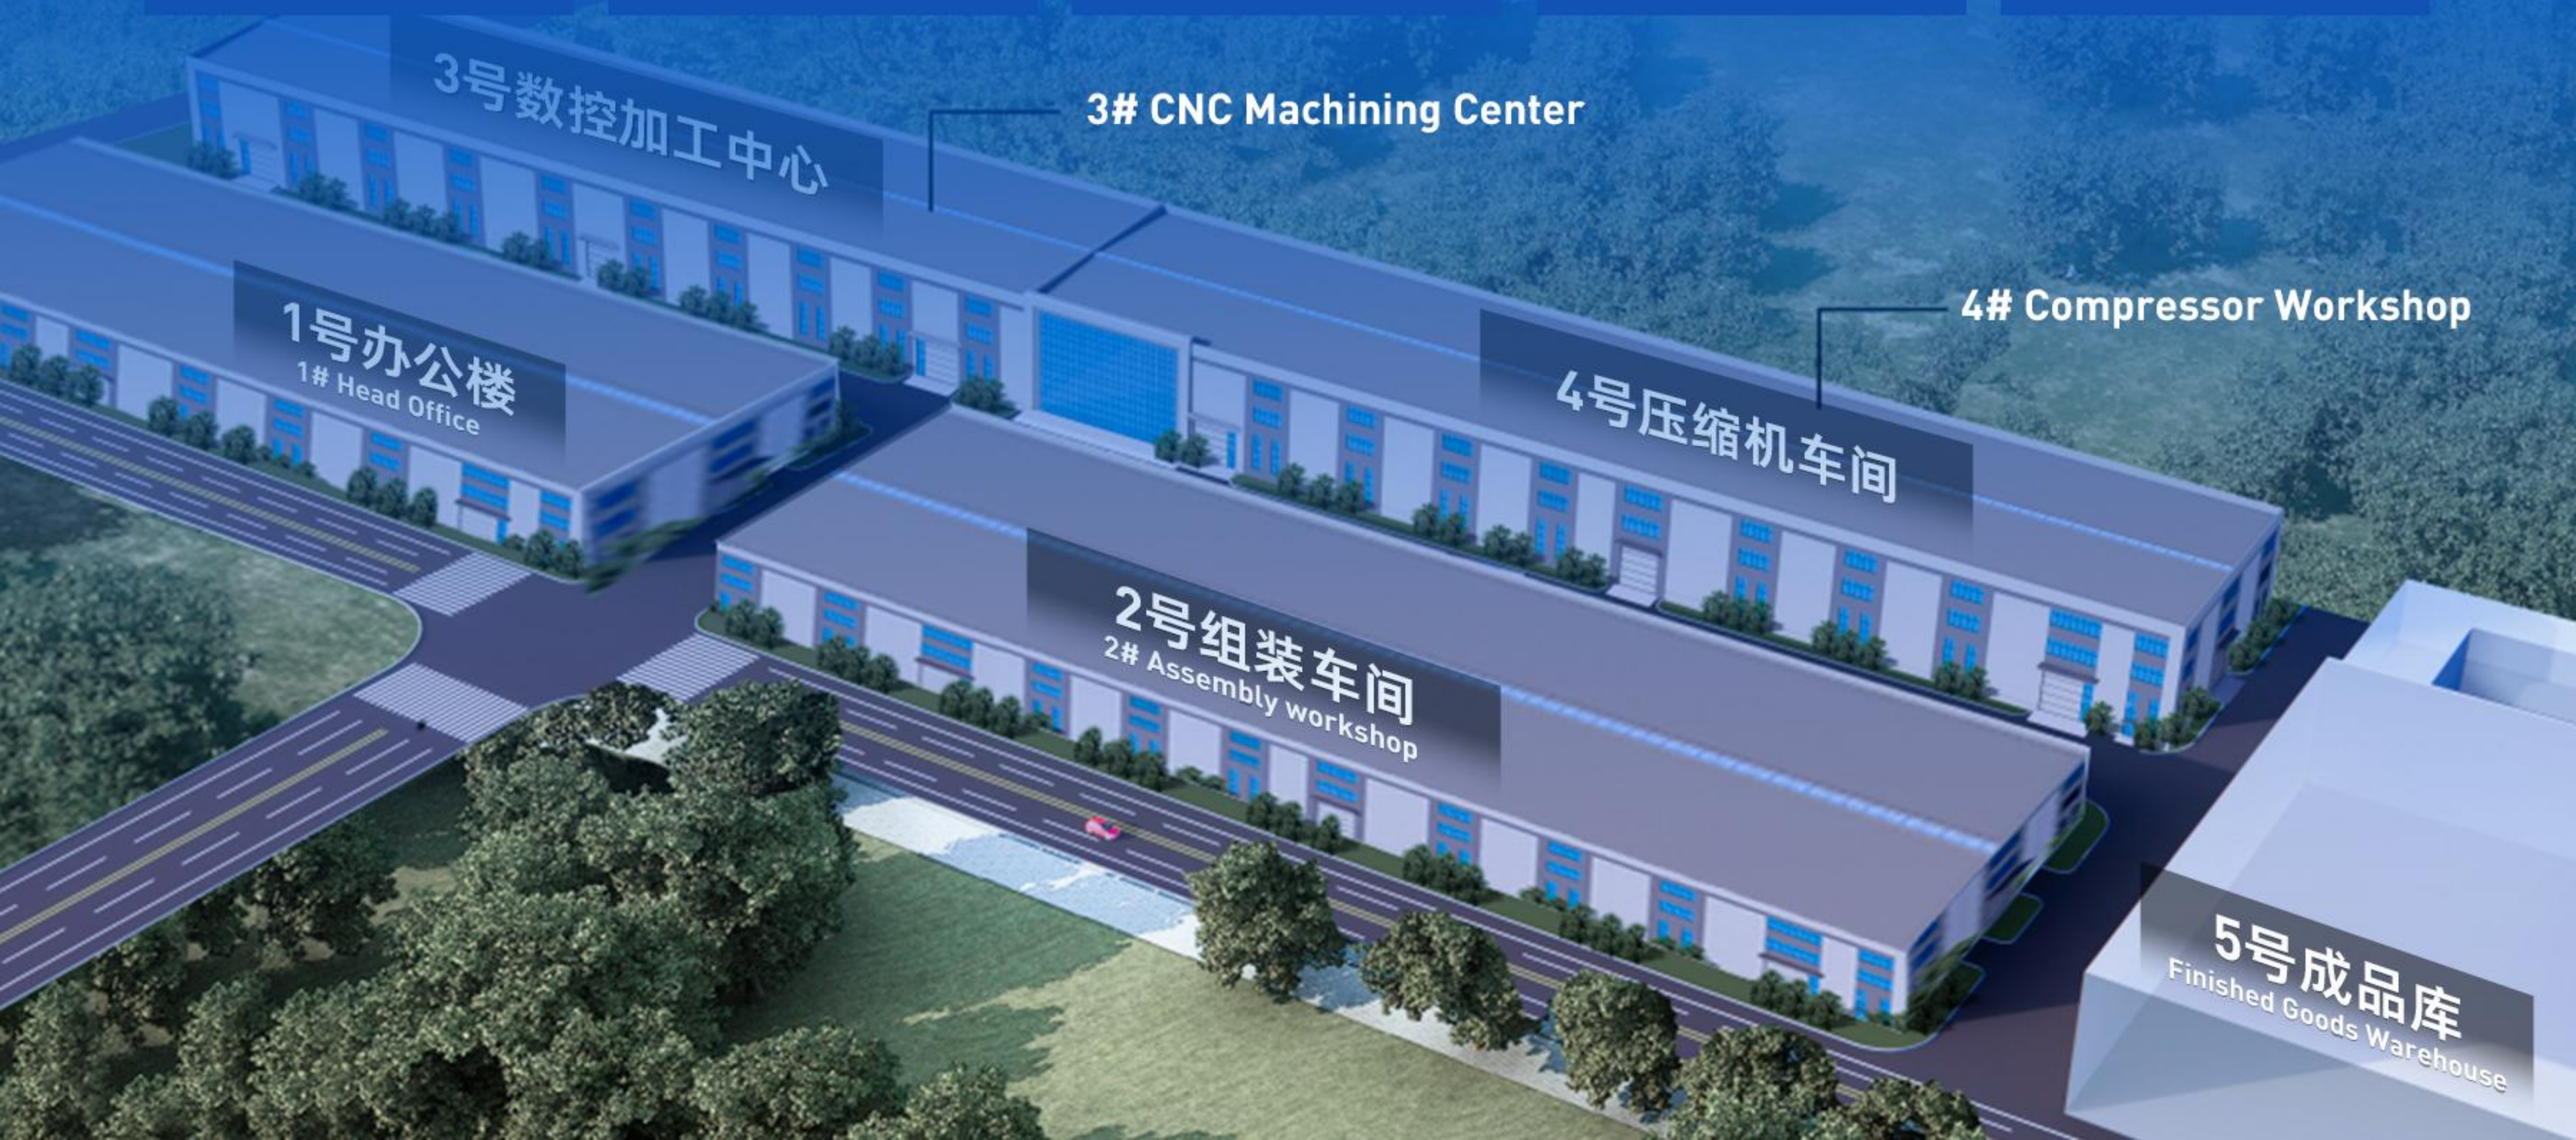

For Heavy Duty Truck

DC Rooftop Air Conditioner

S9 | S7 | M9 | M7 | S3000 | D9000 | D6000 | D4000 | T600 | S600

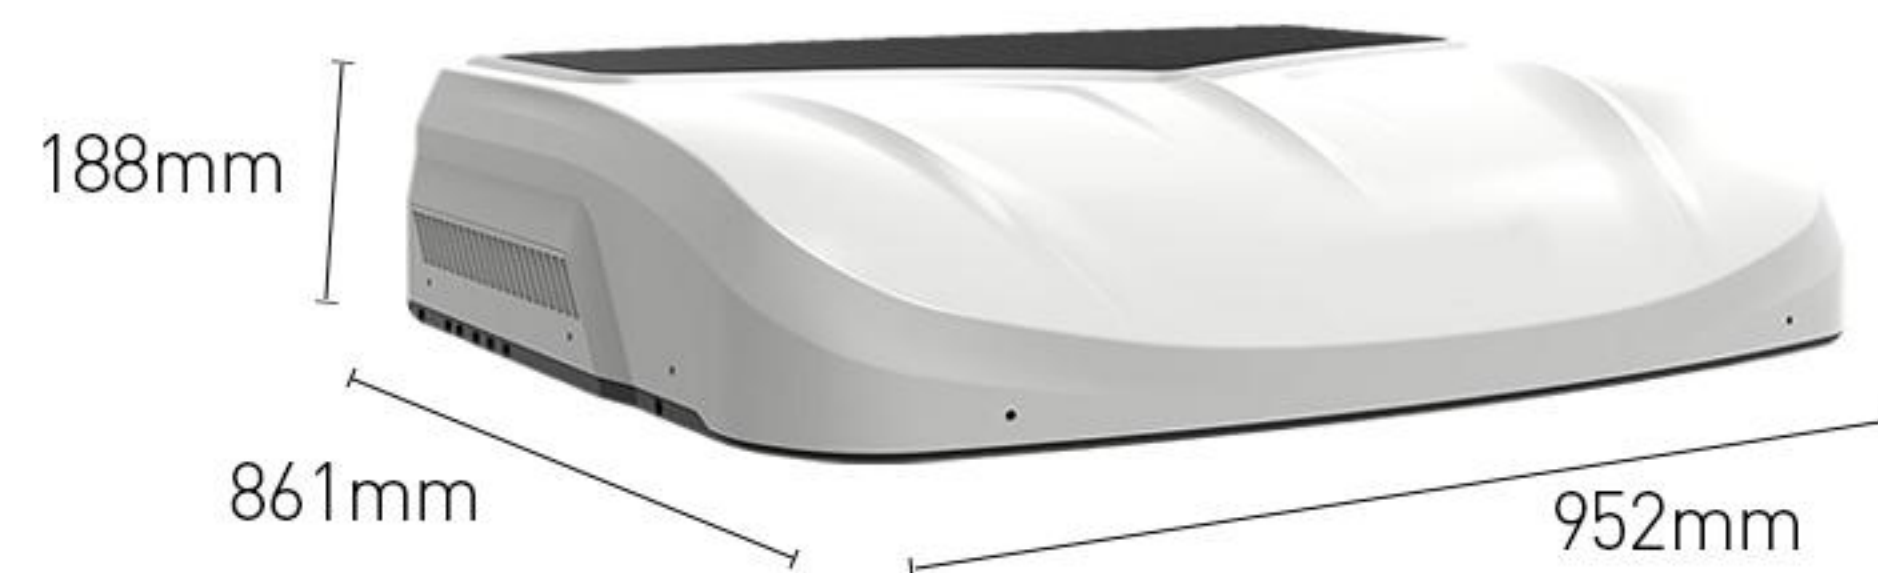

Refrigerant	R134a	
Noise value	45dB(A)	
Refrigerant charging volume	580±10g	
Air outlet volume	240-480m³/h	
Outdoor unit size	861*952*188mm	
Interior unit size	454*283mm	
Roof Cut Size (Max size)	500*700mm	
Product weight	45kg	

Voltage	12V	24V
Energy efficiency ratio	≥2.27	≥2.55
Rated power	400-780W	400-980W
Rated cooling capacity	10500BTU	12000BTU


S7



Refrigerant	R134a	
Noise value	45dB(A)	
Refrigerant charging volume	460±10g	
Air outlet volume	240-480m ³ /h	
Outdoor unit size	812*961*190mm	
Interior unit size	454*283mm	
Roof Cut Size (Max size)	500*700mm	
Product weight	37kg	

Voltage	12V	24V
Energy efficiency ratio	≥2.27	≥2.55
Rated power	400-780W	400-980W
Rated cooling capacity	8300BTU	10000BTU

M9

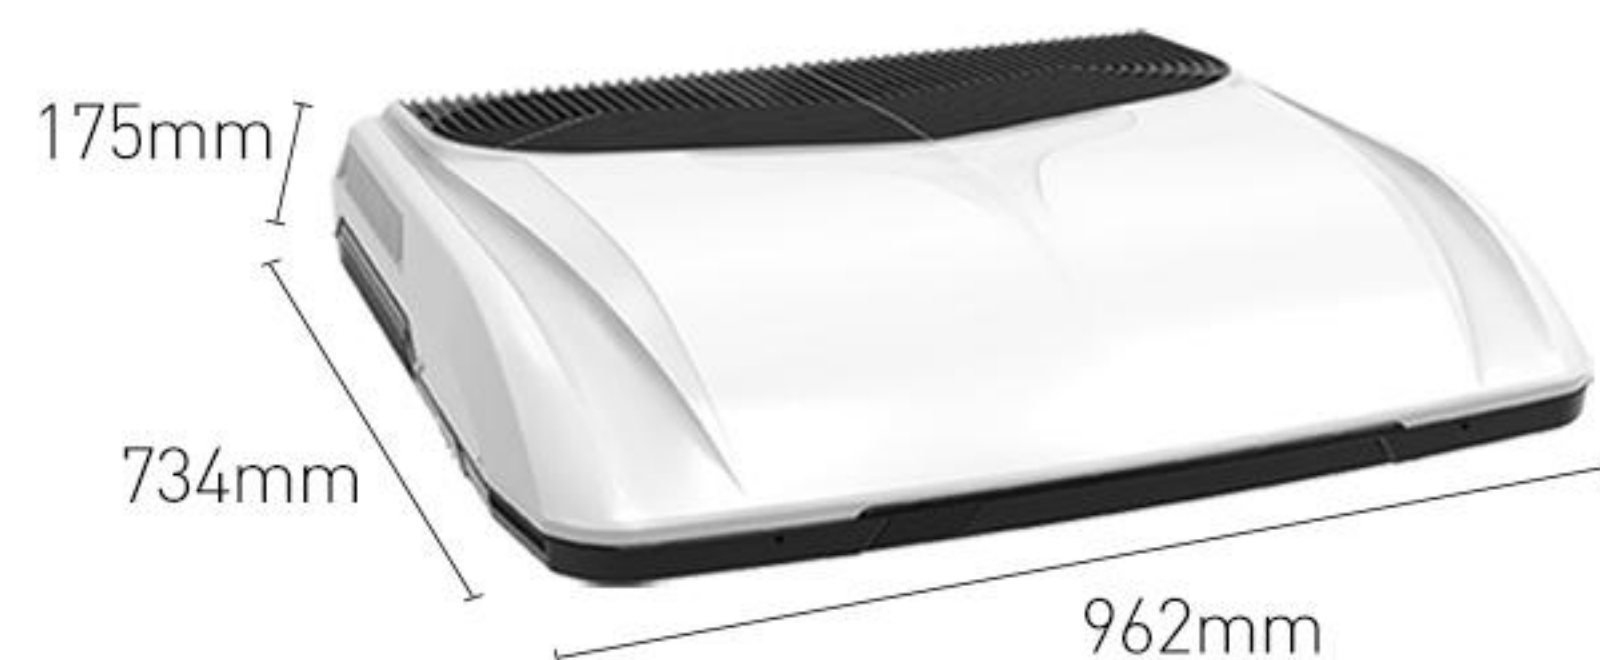

Refrigerant	R134a	
Noise value	45dB(A)	
Refrigerant charging volume	460±10g	
Air outlet volume	240-450m ³ /h	
Outdoor unit size	734*962*175mm	
Interior unit size	454*283mm	
Roof Cut Size (Max size)	500*700mm	
Product weight	43kg	

Voltage	12V	24V
Energy efficiency ratio	≥2.4	≥2.7
Rated power	400-750W	400-850W
Rated cooling capacity	8000BTU	10500BTU

M7



Refrigerant			R134a
Noise value			45dB(A)
Refrigerant charging volume			460±10g
Air outlet volume			240-450m ³ /h
Outdoor unit size			812*961*190mm
Interior unit size			454*283mm
Roof Cut Size (Max size)			500*700mm
Product weight			34.2kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.4	≥2.7	
Rated power	400-750W	400-850W	
Rated cooling capacity	8000BTU	9500BTU	

S3000



Refrigerant			R134a
Noise value			45dB(A)
Refrigerant charging volume			360±10g
Air outlet volume			240-450m ³ /h
Outdoor unit size			792*974*129mm
Interior unit size			561*349*130mm
Roof Cut Size (Max size)			500*700mm
Product weight			36kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.4	≥2.7	
Rated power	200-800W	200-850W	
Rated cooling capacity	8000BTU	9500BTU	

D9000



Refrigerant		R134a
Noise value		45dB(A)
Refrigerant charging volume		400±10g
Air outlet volume		400m³/h
Outdoor unit size		790*976*129mm
Interior unit size		565*351*189mm
Roof Cut Size (Max size)		500*700mm
Product weight		34.5kg
Voltage	12V	24V
Energy efficiency ratio	≥2.4	≥2.7
Rated power	500-800W	200-800W
Rated cooling capacity	7500BTU	8000BTU

D4000



Refrigerant		R134a
Noise value		45dB(A)
Refrigerant charging volume		360±10g
Air outlet volume		400m³/h
Outdoor unit size		969*734*195mm
Interior unit size		561*349*189mm
Roof Cut Size (Max size)		500*700mm
Product weight		34.5kg
Voltage	12V	24V
Energy efficiency ratio	≥2.4	≥2.7
Rated power	400-800W	400-850W
Rated cooling capacity	7500BTU	8000BTU

T600



Refrigerant			R134a
Noise value			45dB(A)
Refrigerant charging volume			550±20g
Air outlet volume			380m ³ /h
Outdoor unit size			940*810*180mm
Interior unit size			340*340mm
Roof Cut Size (Max size)			500*700mm
Product weight			36.5kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.5	≥2.7	
Rated power	400-600W	400-850W	
Rated cooling capacity	8000BTU	9500BTU	

S600



Refrigerant			R134a
Noise value			45dB(A)
Refrigerant charging volume			550±20g
Air outlet volume			380m ³ /h
Outdoor unit size			940*810*180mm
Interior unit size			340*340mm
Roof Cut Size (Max size)			500*700mm
Product weight			36.5kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.5	≥2.7	
Rated power	400-600W	400-850W	
Rated cooling capacity	8500BTU	10500BTU	


Perfect Cooling Solution For RVs & Campers



For Light Truck&RV

DC Rooftop Air Conditioner

M6 | M5 | Max | Classic | Pro

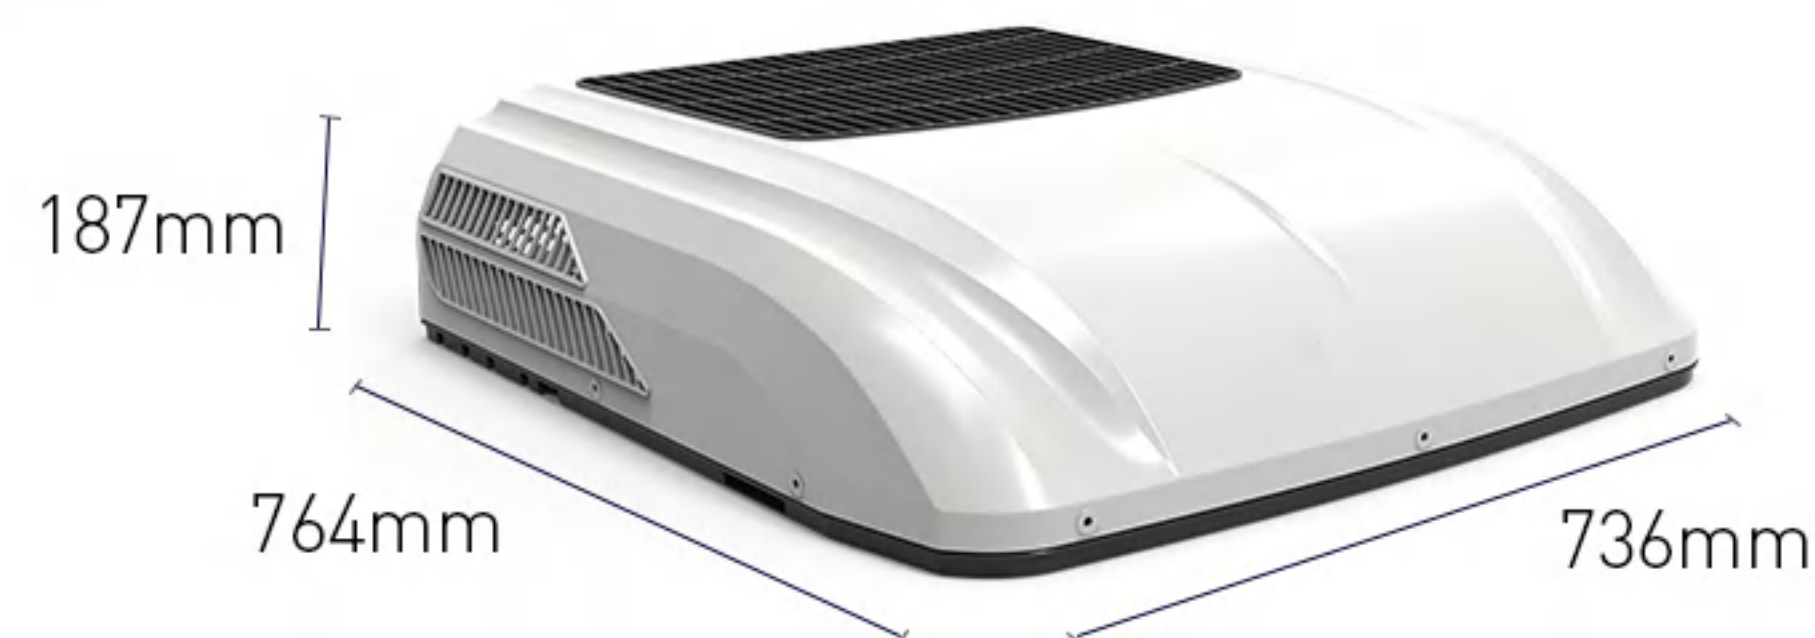

Refrigerant	R134a	
Noise value	40dB(A)	
Refrigerant charging volume	360±10g	
Air outlet volume	240-300m³/h	
Outdoor unit size	764*736*187mm	
Interior unit size	374*258*67mm	
Roof Cut Size (Max size)	500*700mm	
Product weight	29kg	
Voltage	12V	24V
Energy efficiency ratio	≥2.14	≥2.15
Rated power	400-700W	400-790W
Rated cooling capacity	7500BTU	8300BTU

M5



Refrigerant	R134a	
Noise value	40dB(A)	
Refrigerant charging volume	300±10g	
Air outlet volume	350m³/h	
Outdoor unit size	700*730*150mm	
Interior unit size	374*258*67mm	
Roof Cut Size (Max size)	360*450mm	
Product weight	28kg	

Voltage	12V	24V
Energy efficiency ratio	≥2.4	≥2.3
Rated power	400-660W	400-800W
Rated cooling capacity	7500BTU	8000BTU

MAX



Refrigerant	R134a	
Noise value	40dB(A)	
Refrigerant charging volume	300±10g	
Air outlet volume	350m³/h	
Outdoor unit size	640*730*168mm	
Interior unit size	540*320mm	
Roof Cut Size (Max size)	360*450mm	
Product weight	28kg	

Voltage	12V	24V
Energy efficiency ratio	≥2.4	≥2.3
Rated power	400-660W	400-800W
Rated cooling capacity	7500BTU	8000BTU

Pro

Heating & Cooling



Refrigerant	R134a		
Noise value	40dB(A)		
Refrigerant charging volume	310±10g		
Air outlet volume	320m³/h		
Outdoor unit size	726*730*156mm		
Interior unit size	560*430mm		
Roof Cut Size (Max size)	300*450mm		
Product weight	26kg		

Voltage	12V	24V	36~100V
Energy efficiency ratio	≥2.5	≥2.7	≥2.7
Rated power	400-650W	400-800W	400-800W
Rated cooling capacity	7500BTU	8000BTU	8000BTU

Classic

Heating & Cooling




Refrigerant	R134a		
Noise value	40dB(A)		
Refrigerant charging volume	300±10g		
Air outlet volume	350m³/h		
Outdoor unit size	647*708*161mm		
Interior unit size	540*320mm		
Roof Cut Size (Max size)	360*450mm		
Product weight	26kg		

Voltage	12V	24V	36~100V
Energy efficiency ratio	≥2.4	≥2.3	≥2.3
Rated power	400-660W	400-800W	400-800W
Rated cooling capacity	7000BTU	7500BTU	7500BTU

For Construction Vehicle&RV

DC Split Type Air Conditioner

Dual-Fan Backpack | Backpack Type | Small Backpack | Box Type

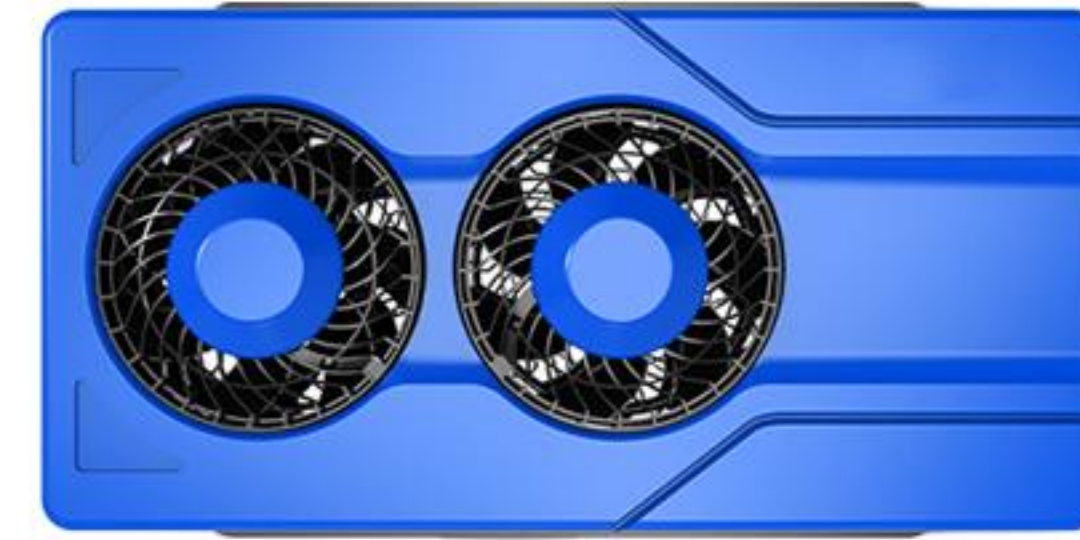

Refrigerant	R134a	
Refrigeration oil	POE68	
Noise value	45dB(A)	
Refrigerant charging volume	600±10g	
Air outlet volume	450m³/h	
Outdoor unit size	851*462*231mm	
Interior unit size (Silent indoor unit)	635*330*190mm	
Product weight	27kg	
Voltage	12V	24V
Energy efficiency ratio	≥2.27	≥2.55
Rated power	400-780W	400-980W
Rated cooling capacity	8000BTU	9500BTU

Backpack Type



Refrigerant			R134a
Refrigeration oil			POE68
Noise value			45dB(A)
Refrigerant charging volume			600±10g
Air outlet volume			250-459m³/h
Outdoor unit size			690*465*155mm
Interior unit size			460*320*160mm
Product weight			27kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.2	≥2.2	
Rated power	400-800W	400-900W	
Rated cooling capacity	8500BTU	10000BTU	

Small Backpack



Refrigerant			R134a
Refrigeration oil			POE68
Noise value			45dB(A)
Refrigerant charging volume			600±10g
Air outlet volume			350m³/h
Outdoor unit size			725*370*200mm
Interior unit size (Silent indoor unit)			635*330*190mm
Product weight			27kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.4	≥2.4	
Rated power	400-800W	400-850W	
Rated cooling capacity	7800BTU	8000BTU	

Box Type



Refrigerant			R134a
Refrigeration oil			POE68
Noise value			65dB(A)
Refrigerant charging volume			600±10g
Air outlet volume			350m³/h
Outdoor unit size			660*542*232mm
Interior unit size (Five-hole internal machine)			455*320*155mm
Product weight			27kg
Voltage	12V	24V	
Energy efficiency ratio	≥2.4	≥2.4	
Rated power	400-800W	500-1000W	
Rated cooling capacity	7500BTU	8500BTU	

ZHONGCHENG AUTO PARTS CO., LTD.

Thanks For Watching

